



GA-017 CASA

- Lival innovation – ECG fitted inside the adapter
- Good light in small form factor – no separate housing part


GA-017 CASA

Input Power	CRI & CCT Options	Cooling	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	Passive Cooling	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB: S 15° NFL 21° FL 32° WFL 46°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

LED Module: Citizen CLU038-1206 5Gen – COB Luminous flux:

Output Current /
Module Wattage /
System Wattage:

	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
500mA / 17W / 18W	2 625Lm	2 725Lm	2 775Lm	1 975Lm	2 050Lm	2 100Lm	2 225Lm
550mA / 19W / 21W	2 850Lm	2 950Lm	2 975Lm	2 150Lm	2 250Lm	2 300Lm	2 425Lm
600mA / 21W / 23W	3 075Lm	3 175Lm	3 200Lm	2 300Lm	2 400Lm	2 450Lm	2 575Lm
650mA / 23W / 25W	3 275Lm	3 375Lm	3 425Lm	2 475Lm	2 575Lm	2 725Lm	2 775Lm

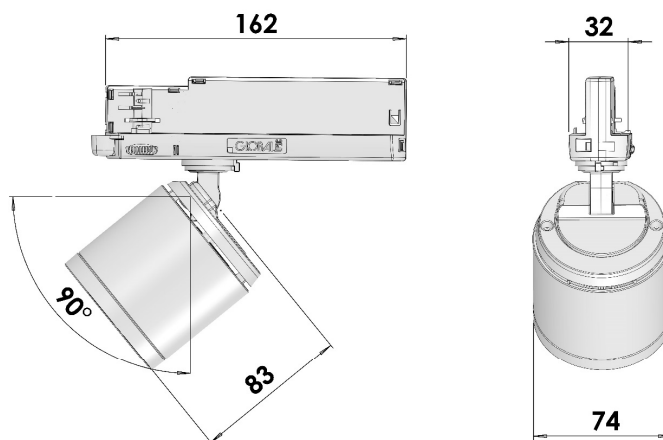

IP20

LED Design | Made In Finland

LIVAL