

## KE-LED-EA 3006-P



LED Ein- und Anbauleuchte für den Einbau in Maschinen, Fahrzeugen und elektrischen Geräten aller Art. Blendfreies Licht dank speziellem Prismenschutzrohr.

- Leuchtmittel: 6 POWER LEDs / 6500K
- Schutzrohr: Polycarbonat, schlagfest, 30mm Ø
- Abschlusskappen: ABS, schwarz
- Befestigung: inkl. 2 Klammern aus Federstahl
- Schutzart: IP54
- Schutzklasse: II / III
- Zuleitung: 5m H05RN-F 2x1,00mm<sup>2</sup>
- Spannungsvarianten: 230V / 110V / 24V / 12V
- Längere Zuleitung, Kabeltyp, Stecker etc. auf Anfrage

LED built-in and surface mounted lamp for the integration in machines, vehicles and all kind of electric devices. Dazzle-free light based on special prismatic-shaped protection tube.

- Illuminant: 6 POWER LEDs / 6500K
- Protection tube: polycarbonate, shock-resistant, 30mm Ø
- End caps: ABS, black
- Fixation: incl. 2 fixing clamps made of spring steel
- Protection category: IP54
- Protection class: II / III
- Cable: 5m H05RN-F 2x1,00mm<sup>2</sup>
- Voltage: 230V / 110V / 24V / 12V
- Longer cable, cable type, plug etc. on request

Lampe LED encastré, idéal pour le montage dans des machines, des véhicules, appareils électriques etc. Exempt d'éblouissement grâce au tube de protection prismatique spécial.

- Agent lumineux: 6 POWER LEDs / 6500K
- Tube de protection: polycarbonate, antichoc, 30mm Ø
- Pièces de fermetures : ABS, noir
- Fixage : inclus 2 attaches fixations en acier à ressort
- Type de protection: IP54
- Classe de protection: II resp. III
- Câble : 5m H05RN- F 2x1,00mm<sup>2</sup>
- Voltage: 230V / 110V / 24V / 12V
- Câble plus long, type de câble, fiche, etc. sur demande


LED in- en opbouwarmatuur ideaal voor inbouw in machines, voertuigen en elektrische apparaten. Verblindingsvrij licht door gebruik van speciale prismatische beschermhuis.

- Lamp: 6 POWER LEDs / 6500K
- Beschermhuis: polycarbonaat, slagvast, 30mm Ø
- Afsluitkappen: ABS, zwart
- Bevestigingsklemmen: incl. 2 klemmen van veerstaal
- Beschermwaarde: IP54
- Beschermklasse: II / III
- Kabel: 5m H05RN-F 2x1,00mm<sup>2</sup>
- Voedingsspanningen: 230V / 110V / 24V / 12V
- Andere kabel en -lengte, stekker etc. op aanvraag

### Technische Details | Technical details | Détails techniques | Technische details

Type	Anzahl LED	Volt	Ampere	Lumen	Schutzklasse	Schutzrohr	IP	Zuleitung	Stecker	Gewicht	Art.-Nr.
Type	Number LED	Volt	Ampere	Lumen	Protection Class	Protective Tube	IP	Cable	Plug	Weight	Art.-No.
KE-LED-EA 3006-P/230	6	230V AC	0,045	700	II	Polycarbonat	IP54	5m H05RN-F	Konturen-	0,5 kg	131606
KE-LED-EA 3006-P/110	6	110 AC/DC	0,050	700	II	Polycarbonat	IP54	5m H05RN-F	ohne	0,5 kg	131607
KE-LED-EA 3006-P/42	6	42 AC/DC	0,140	700	III	Polycarbonat	IP54	5m H05RN-F	ohne	0,5 kg	131608
KE-LED-EA 3006-P/24	6	24 AC/DC	0,180	700	III	Polycarbonat	IP54	5m H05RN-F	ohne	0,5 kg	131609
KE-LED-EA 3006-P/12	6	12 AC/DC	0,280	700	III	Polycarbonat	IP54	5m H05RN-F	ohne	0,5 kg	131611

### Abmessungen | Dimensions | Dimensions | Afmeting

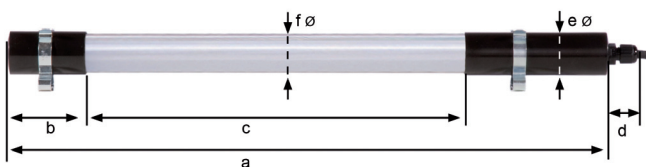

Abmessungen in mm | Dimensions in mm

	a	b	c	d	e	f
KE-LED-EA 3006-P	454	60	287	25	33	30