



# CASA CIRCLE DL

# CASA CIRCLE DL

Input Power	LED-Module *Citizen 6-Gen	Color Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K  CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	2-Step MacAdam	Ceiling mounted recessed luminaire	Powder Painted Die-Cast Aluminum	50 000h	1206 COB: S 15° NFL 21° FL 32° WFL 46°	White (RAL 9016)  Silver (Ca. RAL 9006)  Black (RAL 9005)

LED Module: Citizen CLU038-1206 6Gen – COB luminous flux:


Output Current /  
Module Wattage /  
System Wattage:

650mA / 23W / 25W

700mA / 24W / 27W

750mA / 26W / 29W

CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
3 275Lm	3 375Lm	3 425Lm	2 475Lm	2 575Lm	2 725Lm	2 775Lm
3 450Lm	3 550Lm	3 600Lm	2 700Lm	2 800Lm	2 850Lm	3 000Lm
3 650Lm	3 750Lm	3 800Lm	2 825Lm	2 925Lm	2 975Lm	3 150Lm

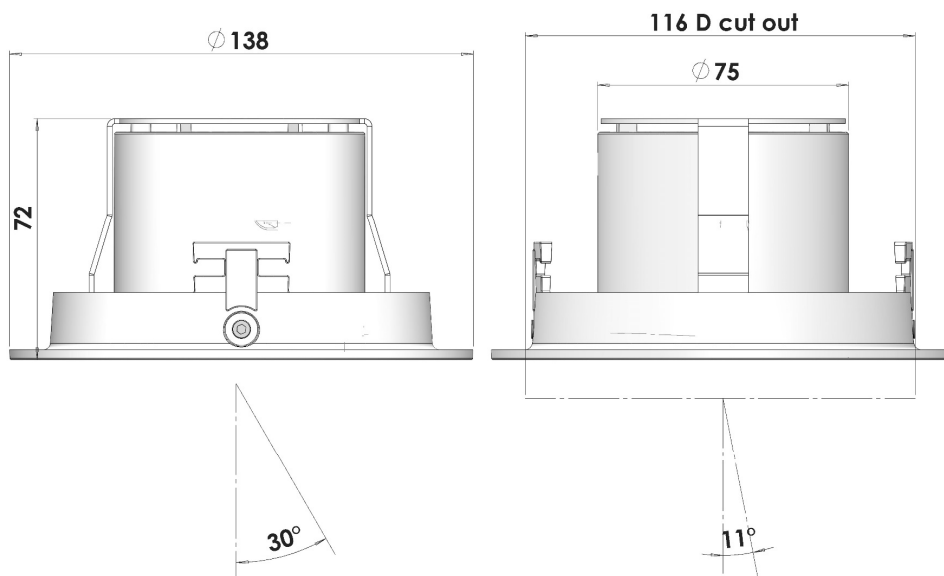

IP20

CASA Circle dimensions  
LED Design | Made In Finland

**LIVAL**