



# SCOPE


\* Ideal for general lighting and wall washing for retail applications

Input Power	LED-Module *TCI LM415/44R96	Installation Type	Material	Warranty	Diffuser Types	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K	Nordic Aluminium 3- & 1- phase tracks	Powder Painted Extruded Aluminium	50 000h	Opal, Direct & Asymmetric	White (RAL 9016) Black (RAL 9005)


### Consumption & Luminous flux:

CRI 80+ 3 000K	CRI 80+ 4 000K
<b>3 540Lm</b> 500mA Module 23W System 27W	<b>3 600Lm</b> 500mA Module 23W System 27W


### Product Dimensions:

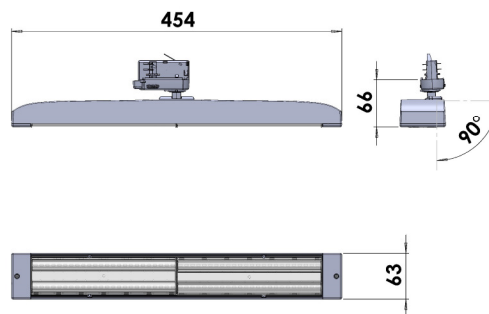


### Opal Diffuser

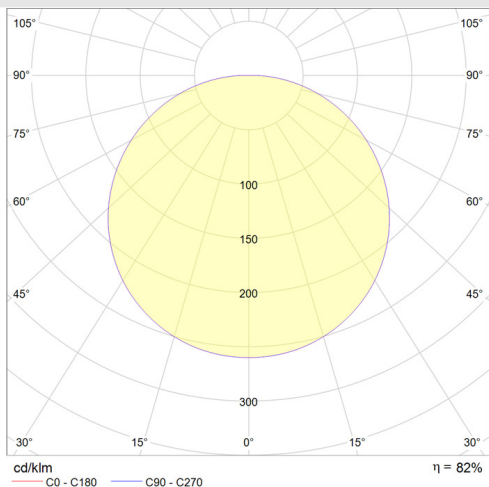

### Direct Diffuser

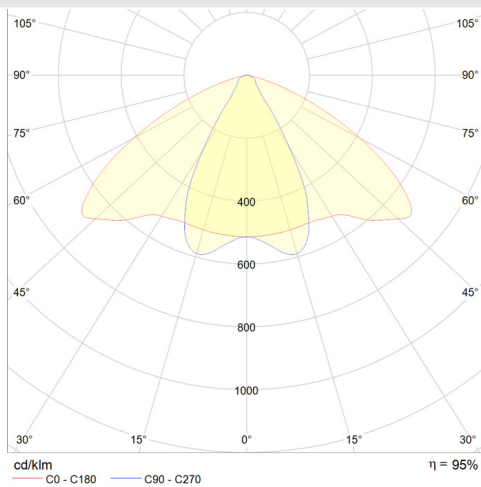

### Asymmetric Diffuser

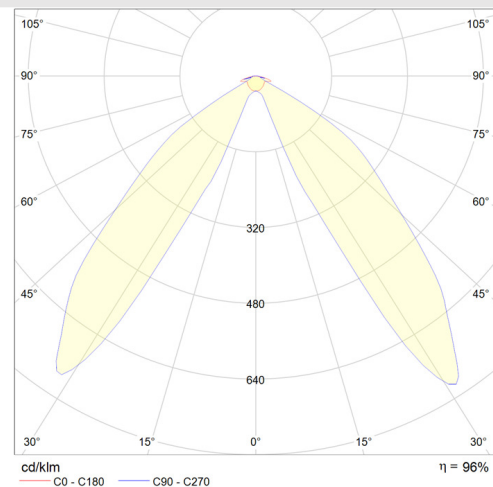

IP20

LED Design | Made In Finland

**LIVAL**